



# **GH393**

## **Plant Pot Mover**



# **User Manual**

Please retain for future reference

## IMPORTANT

*Installer and users please note:*

Please read the entire instruction manual before using the product and then save it for future reference. We reserve the right for any errors in text or images and any necessary changes made to technical data.

## PRODUCT SAFETY

- Maximum Load = 75kg.
- Never exceed the maximum load
- Children shall not play with the mover.
- Cleaning and maintenance shall not be made by children without supervision.
- Do not use the mover for anything other than its intended use.

## IDENTIFICATION OF PARTS

- A. Handle Pole
- B. Movable Trigger Handle
- C. Trigger Handle Forks
- D. Protective Caps
- E. Suction Cups
- F. Pot Support Fork
- G. Wheeled Base

### ADDITIONAL PARTS



Allenwrench(1)




Base(1) & washer(1)



Handle screws(2)








Metal fork platform  
cotter pins(2)

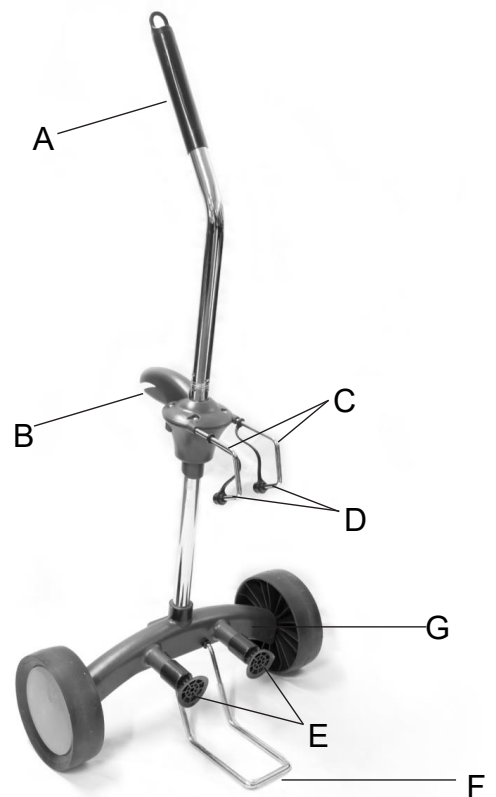

## ASSEMBLY INSTRUCTIONS





1. Twist the top of the handle pole onto the bottom of the handle pole. Secure the assembled handle pole with the 2 small screws. Tighten the screws with the included Allen wrench (Figure 1).
2. Squeeze the trigger on the movable trigger handle and slide it onto the assembled handle pole. *Please note: the trigger handle forks should be pointing downward* (Figure 2).
3. Take the assembled handle and insert it into the wheeled base. *Please note: the trigger handle forks should be facing the same direction as the suction cups on the wheeled base. Secure the handle pole to the wheeled base with the included Phillips head screw* (Figure 3).
4. Insert the pot support fork into the wheeled base (Figure 4).

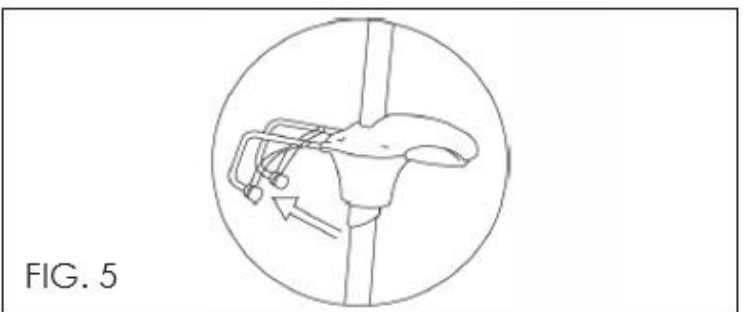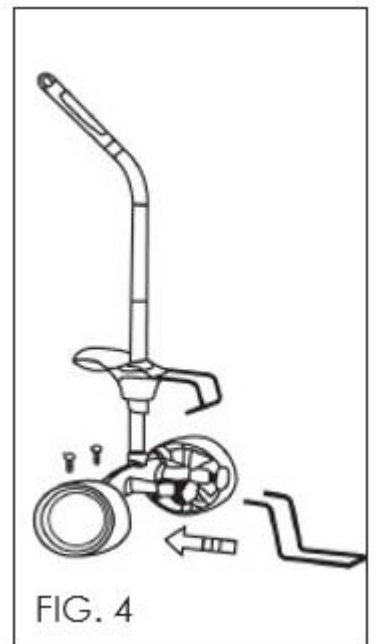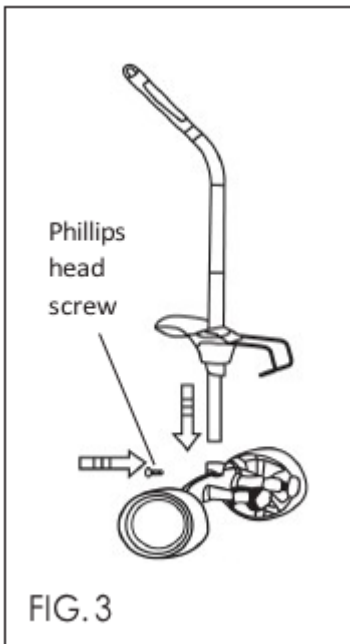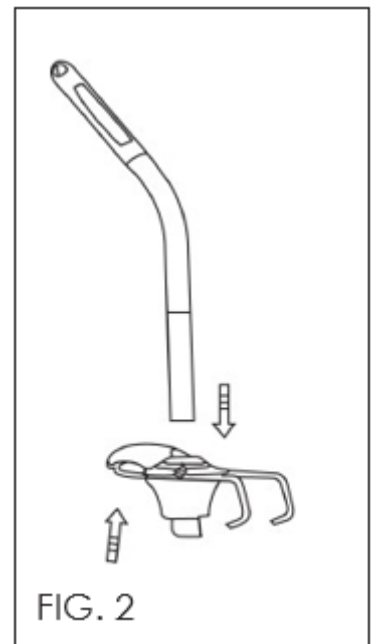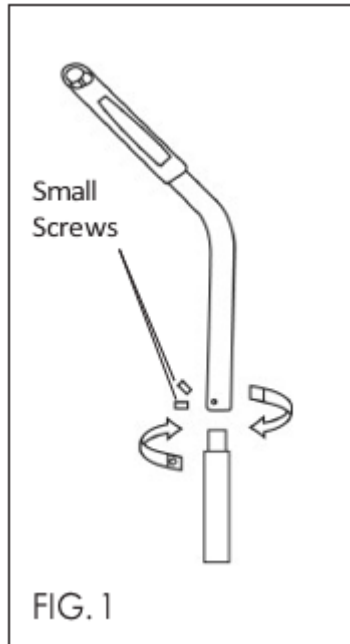

## MOVING HEAVY POTS

*Note: Before moving any pots, please make sure the plastic protective caps are covering the metal ends of the trigger handle forks. This will prevent scratches and damage to your pots (Figure 5).*

1. Position the assembled potted plant mover so that the suction cups come into contact with the base of the pot you wish to move (Figure 6).
2. Squeeze the trigger and slide the movable trigger handle downward so that the trigger handle forks are able to grab the edge of the pot (Figure 7).
3. Using your foot, gently push forward on the bottom of the potted plant mover, while at the same time, pulling back on the handle pole (Figure 8).
4. When you reach your destination, gently lower the pot down to the ground (Figure 9).

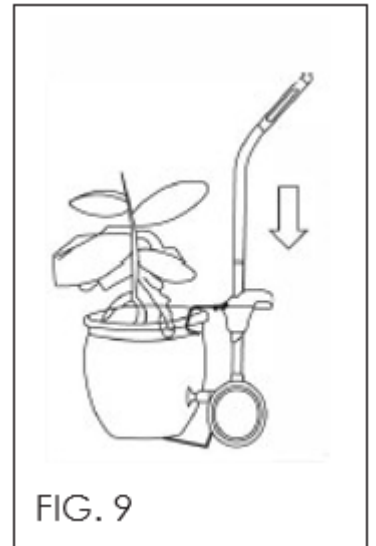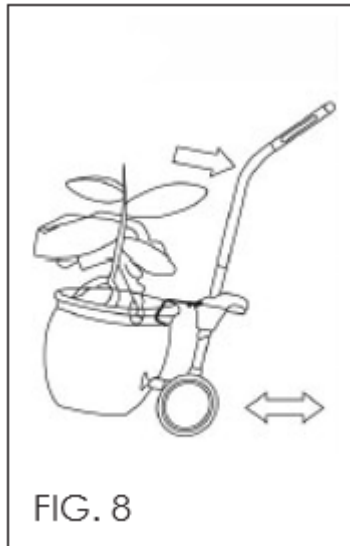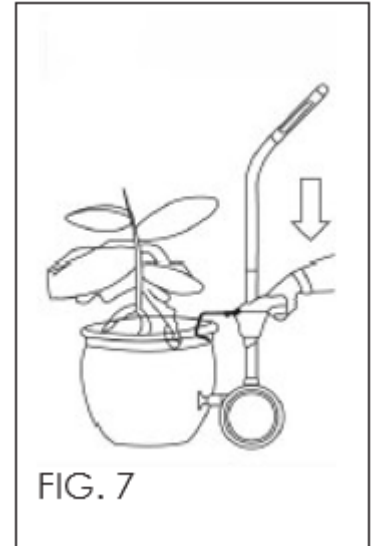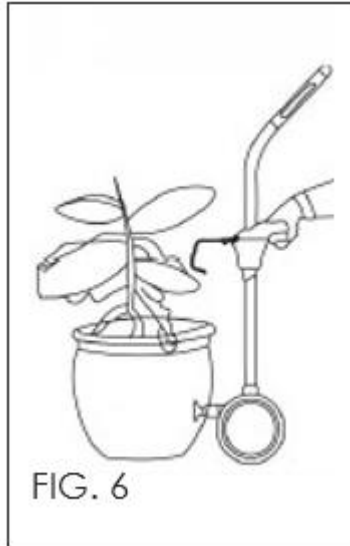

### SERVICE WARRANTY

Electrovision guarantees the product free from defects in materials and workmanship for a period of 1 year. Should this unit be used under conditions other than those recommended, or any attempts made to service or modify the unit, then the warranty will be rendered void. The product you buy may sometimes differ slightly from illustrations. This warranty is in addition to, and does not affect, your statutory rights. If you have any problems with this product, please call our help desk on (0845) 459 4816.