



E301LC

T1 Switched Pendant Lamp Holder 60W

Product Manual

IMPORTANT

Installer and Users please note: These instructions should be read carefully before use and this document constitutes part of the product which should be kept safely by the user alongside the product.

BEFORE USE

You must inspect the device for any signs of damage. If the product is damaged, DO NOT use it, and contact your supplier immediately.

PRODUCT SAFETY

- Children shall not play with the device.
- Cleaning and user maintenance shall not be made by children without supervision.
- For indoor use only.
- Do not use the appliance for other than its intended use.
- Check the product before use for damage. If any damage is detected stop using it immediately and consult your supplier.


GENERAL SAFETY REQUIREMENTS

Domestic wiring must be tested periodically by a qualified electrician at least once every 10 years or at every change of occupancy. For office and retail premises (and buildings such as village halls) the wiring must be inspected at least once every 5 years. It is recommended that all buildings be fitted with smoke alarms (it is mandatory for new buildings).

GENERAL INSTALLATION INSTRUCTIONS

- 1. Ensure power is completely disconnected before attempting installation.
- 2. If using the new product to replace an old one, note the cable connections an wire up the new product in the same way as the old one, with Earthing as stated in these instructions.
- 3. Cables should be prepared so a sufficient conductor length reaches the terminal. Strip the ends of the individual conductors so that an adequate length enters the terminals.
- 4. Unscrew the top part of the pendant cover and route the cable through the hole.
- 5. Slide the cable grip over the cable part that will be <u>inside</u> the pendant (you will not be able to attach this once the terminal connections have been bade)
- 6. Connect the Live and Neutral cables to the terminals.
- 7. To assist with the correct installation, please consult the wiring diagram in these instructions.
- 8. When connecting the new accessory, ensure that only the bare end of the wire enters the terminal and no bare wires are visible. Always tighten the terminal screws securely, but do not overtighten.
- 9. Pass at least one of the cables underneath the cable relief bar.
- 10. Screw the top part of the pendant cover back on.
- 11. Once work has been completed correctly, replace the fuse for the circuit, switch the power back on and test. The product is now ready for use.

WIRING DIAGRAM

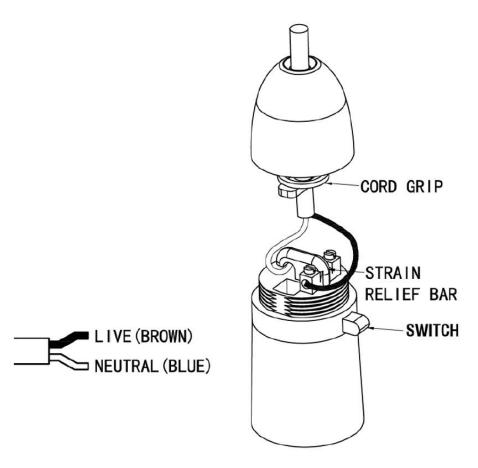

SERVICE WARRANTY

- Eagle guarantees the product free from defects in materials and workmanship for a period of twelve months.
- Should this appliance be operated under conditions other than those recommended, at voltages other than the voltage indicated on the appliance, or any attempts made to service or modify the appliance, then the warranty will be rendered void.
- The product you buy may sometimes differ slightly from illustrations. This warranty is in addition to, and does not affect, your statutory rights.
- Our guarantee is administered by our retailers.
- If your product arrives damaged, you must contact the retailer from whom you bought it. The retailer's contact details will be on the invoice that arrived with the product, or on the e-mail you received when you placed the order. Do not contact Eagle, only your retailer can arrange a replacement.
- If your product fails within the guarantee period, firstly read the "fault finding" section of this manual, because temperature and weather conditions can affect the performance of certain products. If the product needs to be repaired or replaced, you must contact the retailer from whom you bought it.
- If you have just received your product and require technical help using it, please call our Help Desk on (0845) 459 4816
- If you have any other technical queries about the product, please call our Help Desk on (0845) 459 4816

Electrovision Ltd. Lancots Lane, Sutton St. Helens, Merseyside WA9 3EX www.Electrovision.co.uk